

U-STARS TECHNOLOGY CO., LIMITED
USB 2.0 UDP / MUDP (COB / MICROCOB) 16GB
ITE1179+HY FLASH Test Report

USB2.0 UDP / MUDP (COB / MICROCOB)
16GB
ITE1179+HY 3D MLC
Flash Test Report



U-STAR² TECHNOLOGY CO., LIMITED
USB 2.0 UDP / MUDP (COB / MICROCOB) 16GB
ITE1179+HY FLASH Test Report

Table of Contents

1. TEST CONDITION	3
1.1 SYSTEM CONFIGURATION	3
1.2 PLATFORM INFORMATION	3
2. PERFORMANCE TEST	4
2.1 HD BENCH TEST VER.3.4003 (TEST SIZE=1000MB)	4
2.2 ATTO DISK BENCHMARK V2.10 (TOTAL LENGTH = 1GB)	4
2.3 CRYSTALDISKMARK3.0.1 (TOTAL LENGTH = 1000MB)	5
3. RELIABILITY TEST	6
3.1 BURN IN TEST	6
3.2 H2TESTW V1.4	6
3.3 H5 TEST	6
3.4 DATA RETENTION TEST	7

U-STAR³ TECHNOLOGY CO., LIMITED
USB 2.0 UDP / MUDP (COB / MICROCOB) 16GB
ITE1179+HY FLASH Test Report

1. Test Condition

1.1 System Configuration

Flash Part No	H27TDG8T2D8R-BCG
Flash number	1
Test Date	2020/04/30
Controller	ITE 1179
FW Version	1.0.4.3
MP Tool Version	20200430
Form Factor	UDP / MUDP (COB / MICRO COB)
SD Spec	2.0
Capacity	16GB
Notes	

1.2 Platform Information

Win 7

Operation System	Windows Win 7	M/B	
CPU	Intel® G3900 2.80GHz	Chipset	Intel 7
DRAM	4.00GB	Card Reader	

Win XP

Operation System	Windows Win XP	M/B	
CPU	AMD A6-3420M 793MHZ	Chipset	Intel 7
DRAM	2.74 GB	Card Reader	


U-STAR⁴ TECHNOLOGY CO., LIMITED
USB 2.0 UDP / MUDP (COB / MICROCOB) 16GB
ITE1179+HY FLASH Test Report

2. Performance Test

2.1 HD Bench Test Ver.3.4003 (Test size=1000MB)

Note: Test via Windows format (FAT16 of <4GB, FAT32>4GB)

Platform	Host Interface	Seq. Read (KB/Sec)	Seq. Write (KB/Sec)	Ran. Read (KB/Sec)	Ran. Write (KB/Sec)
XP	USB 2.0	20608	11225	17296	2210
Win7	USB 2.0	22319	11374	18273	2234

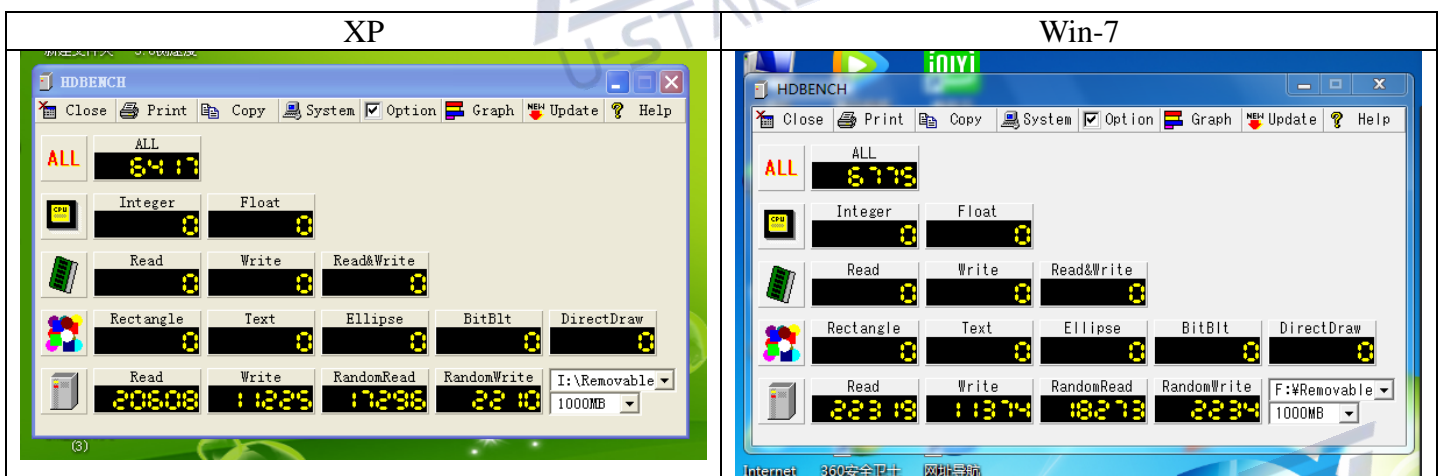


Test Result

2.2 ATTO Disk Benchmark V2.47 (Total Length = 1GB)

Note: Test via Windows format (FAT16 of <4GB, FAT32>4GB)

Test Result

Platform	Host Interface	Read (KB/Sec)	Write (KB/Sec)
XP	USB 2.0	21220	14167
Win 7	USB 2.0	24221	15087

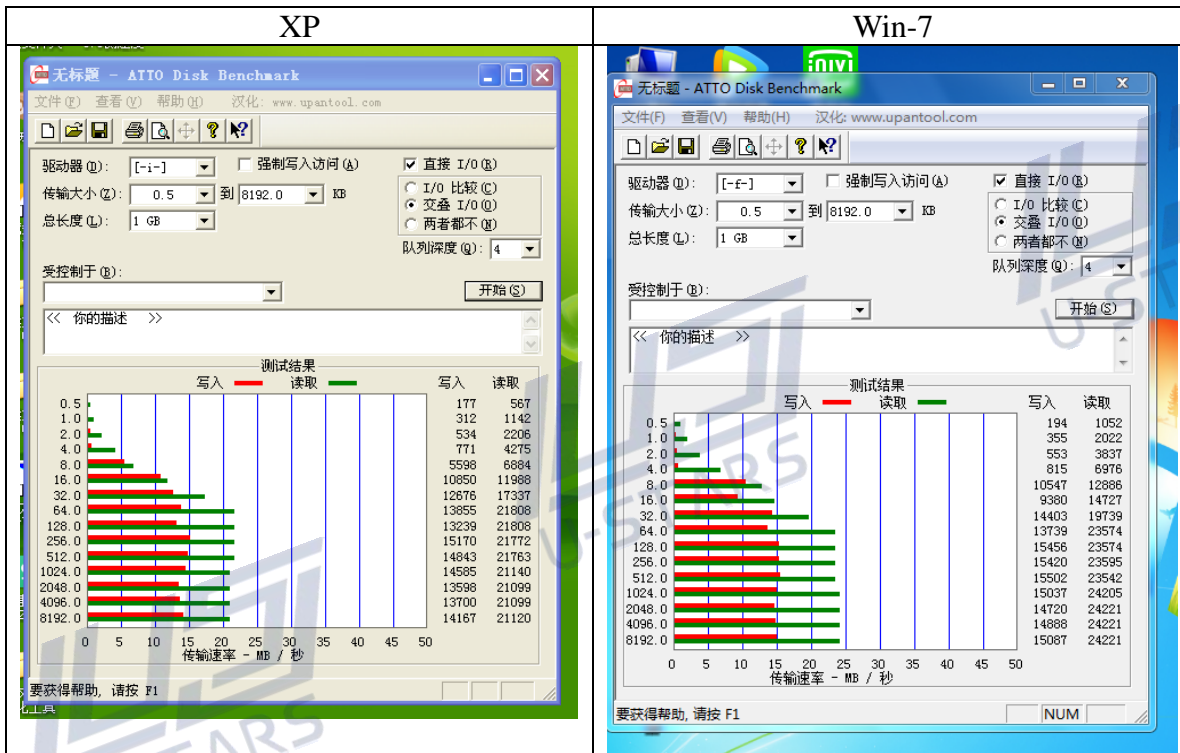


2.3 CrystalDiskMark 3.0.1 (Total Length = 1000MB)

Note: Test via Windows format (FAT16 of <4GB, FAT32>4GB)

Test Result

Platform	Host Interface	Seq. Read (MB/Sec)	Seq. Write (MB/Sec)
XP	USB 2.0	20.49	13.09
Win 7	USB 2.0	25.99	13.57

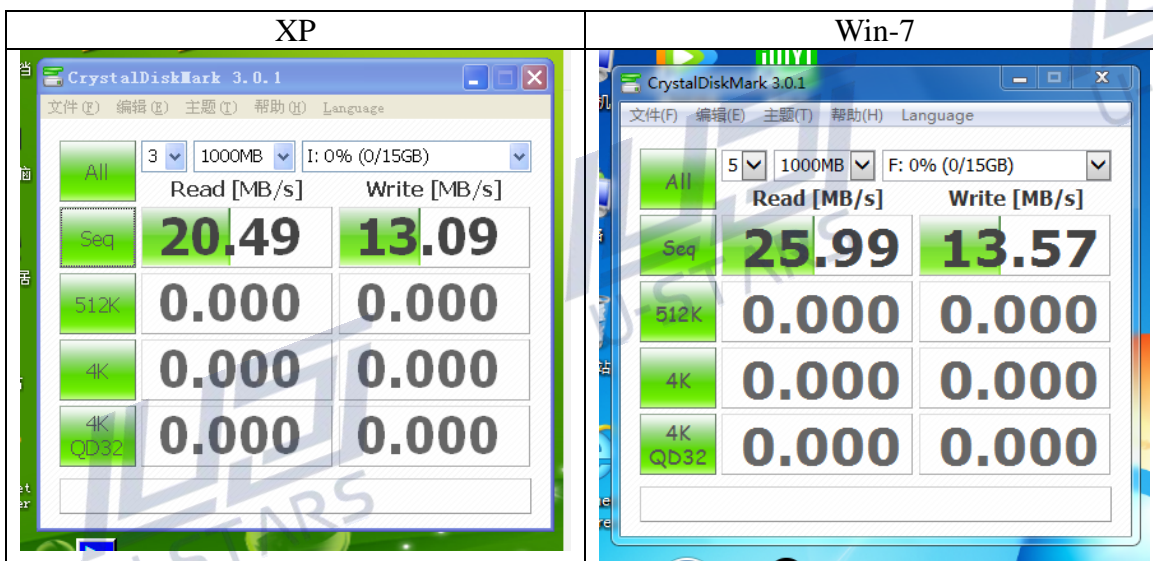

U-STARS TECHNOLOGY CO., LIMITED
USB 2.0 UDP / MUDP (COB / MICROCOB) 16GB
ITE1179+HY FLASH Test Report

3. Reliability Test

3.1 Burn In Test


Burn-In Time: **72 HR**

Test Item	Test Result
Burn in V7.1	-

3.2 H2Testw V1.4

Test Result

Platform	Host Interface	Read(MB/s)	Write(MB/s)	Test Result
XP	USB 2.0	23	8.54	PASS
Win 7	USB 2.0	22.4	9.5	PASS

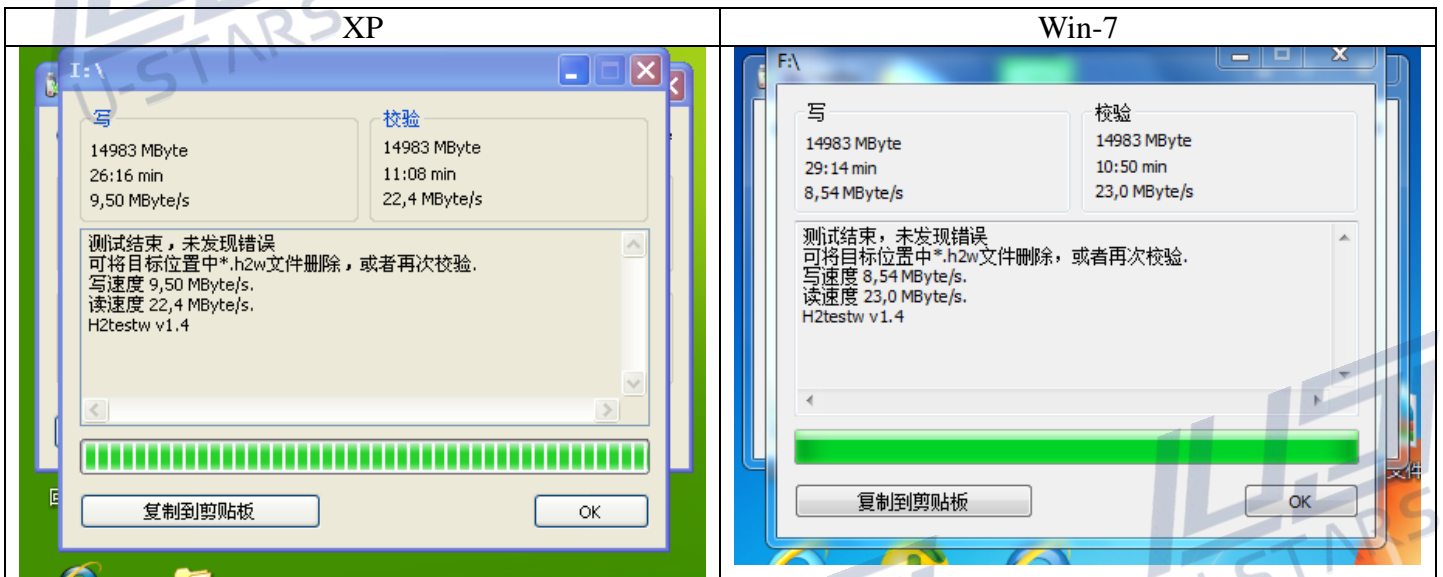

3.3 H5 Test

Test Result

Machine	Quantity	Test Result
U-Reach	500PCS	PASS

U-STAR⁷S TECHNOLOGY CO., LIMITED
USB 2.0 UDP / MUDP (COB / MICROCOB) 16GB
ITE1179+HY FLASH Test Report

3.4 Data Retention Test

Test Result

Temperature	Quantity	Test Date	Test Result
25 °C	10PCS	3 Days later	PASS
	10PCS	7 Days later	PASS
100 °C	10PCS	13 Hours	-